

G1996 Safety Station with Eye/Face Wash, All-Stainless Steel Construction

Application: All-stainless steel combination eye/face wash and shower safety station. Stainless steel construction is ideal for highly corrosive environments and cleanroom applications. Eye/face wash features two large FS-Plus™ spray-type outlet heads that deliver a flood of water for rinsing eyes and face.

Shower Head: 10" diameter stainless steel with 20 GPM flow control.

Shower Valve: 1" IPS Type 316 stainless steel stay-open ball valve. Valve has stainless steel ball and PTFE seals. Furnished with stainless steel actuating arm and 29" stainless steel pull

Spray Head Assembly: Two FS-Plus[™] spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from water flow.

Eye/Face Wash Bowl: 11-1/8" diameter stainless steel.

Eye/Face Wash Valve: 1/2" IPS Type 316 stainless steel stayopen ball valve. Valve has stainless steel ball and PTFE seals.

Pipe and Fittings: Schedule 40 Type 304 brushed stainless steel. Furnished with orange polyethylene pipe covers for high visibility and corrosion resistance.

Supply: 1-1/4" NPT female top or side inlet.

Waste: 1-1/4" NPT female outlet. Outlet can be positioned at either 8-1/4" or 19-3/8" above finished floor by reversing lower pipe nipples.

Sign: ANSI-compliant identification sign.

Quality Assurance: Valve and spray head assemblies are factory assembled and water tested prior to shipment.

Available Options

G6040 Thermostatic mixing valve precisely blends hot
and cold water to deliver tepid water as required by ANSI
Z358.1-2014. Refer to "Thermostatic Mixing Valves" section
for complete technical and product selection information.

BC Stainless steel cover for eye/face wash bowl.


AP275-200 Electric flashing light and alarm horn unit for mounting on wall or vertical pipe. Light illuminates and horn sounds when eye/face wash or shower is activated. Furnished complete with flow switch and mounting hardware.

AP250-015 Modesty curtain for mounting on safety station.





G1996 Safety Station with Eye/Face Wash, All-Stainless Steel Construction

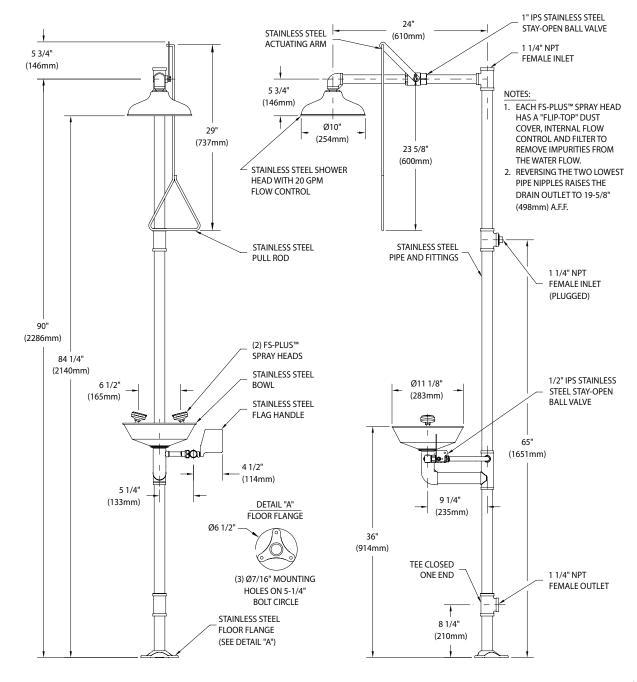

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are \pm 1/4" (6mm). rev. 010820

Sign Included



