

AlphaTec®

66-310

PVC, Fluorescent yellow, 345 g/m²

Formerly known as TRELLECHEM® SPLASH 600

Basic splash protective overall for protection against chemical spray in low-risk environments.

- A versatile everyday workwear
- Made from a soft and flexible fabric, ensuring wearer comfort
- Suit material is antistatic
- Provides good protection against alkalis and acids
- Offers protection against infective agents
- High-visibility material for added safety at the workplace
- Certified to EN 14605:2005, type 4 (spray-tight)



Splash Protection




Re-usable

Applications

- Chemical Handling
- Emergency Teams
- Fire & Rescue Service
- First Response
- Hazmat Teams
- Industrial and Tank Cleaning
- Petrochemicals

Material Construction

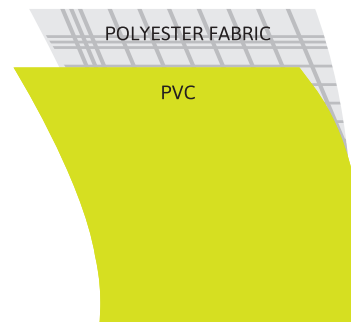

AlphaTec®

66-310

PVC, Fluorescent yellow, 345 g/m²

PRODUCT INFORMATION

AlphaTec® 66-310, PVC 345 g/m ² - Model Description			
	Material	Model	Design features
AlphaTec®	66-310	111	Open legs, open sleeves with hook-and-loop closure.

AlphaTec® 66-310, PVC 345 g/m ²	
Design	Coverall with drawstring hood.
Garment material	Polyester fabric, single coated with PVC. Material weight: 345 g/m ² . PVC is suitable for protection against alkaline chemicals in all concentrations, such as sodium hydroxide and ammonia, and against low to medium concentration acids, such as hydrochloric acid.
Seams	Double welded.
Hood	Drawstring hood with chin flap for added protection.
Sleeves/Gloves & Attachments	Open sleeves with hook-and-loop straps. Gloves are not included, but are available to order.
Legs/Footwear & Attachments	Open legs with elastic (Model 111). Boots are not included, but are available to order.
Zipper	Nylon zipper. The zipper is protected by a double splash guard/flap with press studs.
Colour	Fluorescent yellow
Sizes	XXS - XXXL
Standards & Approvals	<ul style="list-style-type: none">• EN 14605:2005, type 4 (spray-tight)• EN 14126:2003 (infective agent protection)• EN 1149-5:2008 (antistatic suit material)

ANSELL 1906

For additional information, visit us at protective.ansell.com or contact us at:

Ansell Protective Solutions AB
Arenagatan 8B
215 33 Malmö
Sweden
Tel. + 46 10 205 1800
order.protective@ansell.com

Europe, Middle East and Africa
Ansell Healthcare Europe NV
Riverside Business Park
Blvd International, 55
1070 Brussels, Belgium
Tel. + 32 2 528 74 00
Fax + 32 2 528 74 01
info.europe@ansell.com

Latin America & Caribbean
Ansell Brazil Ltda.
Rua das Figueiras 474 - 4º Andar
Bairro Jardim
SP 09080-300 Santo André, Brazil
CNPJ: 03.496.778/0001-21
+55 11 3356 3100
sac@ansell.com

North America
Ansell Healthcare LLC
111 Wood Avenue South, Suite 210
Iselin, NJ 08830, USA
Tel. + 1 800 800 0444
Fax. + 1 800 800 0445
info@ansell.com

Asia Pacific
Ansell Protective Solutions Singapore Pte. Ltd.
237, Pandan Loop,
#05-05 Westech Building
128424 Singapore
Tel. + 65 6908 4115
order.protective@ansell.com

Performance Standards



TYPE 4



EN 14126



EN 1149-5

EN 1149-5:
This applies
only to the
suit material.